



Stitched Combo Mat E-LTC3600

E-LT series

E-LTC3600 is an E-Glass Stitched Combo Mat.

Two layers of roving (550g/m²-1250g/m²) are aligned at 0°/90° with or without layers of chopped strands (0g/m²-500g/m²).

SPECIFICATIONS

Type of Glass
E-Glass (E)

Type of Fiberglass
E-LT series mat

Widths Available:
Maximum: 110 inches

FEATURES:

- Easy handling
- Fast wet-out
- High productivity
- High strength in a specific direction
- Increase of properties of laminated FRP in terms of tensile strength, delaminating resistance under stress and flexural strength
- No binder used
- Reduction of weight of FRP
- Smooth, shiny surface in finished molded parts

USES:

- Automotive bodies
- Boats/yachts
- Cases

PACKING:

Rolls are wound on tubes with high tension. The individual rolls can be wrapped in a plastic bag and protected by a cardboard box. The rolls can be in bulk or packed on pallets (no more than 3 rolls per layer). Pallets are protected by a plastic film and reinforced with PET belts.


TECHNICAL PARAMETERS

Overall Density:
1235.85 g/m²

Roving Density:
0°: 607.6 g/m²
90°: 607.6 g/m²


Polyester Yarn Density:
20.65 g/m²

NOMENCLATURE



Stitched Combo Mat E-LTC3600

E-LT series

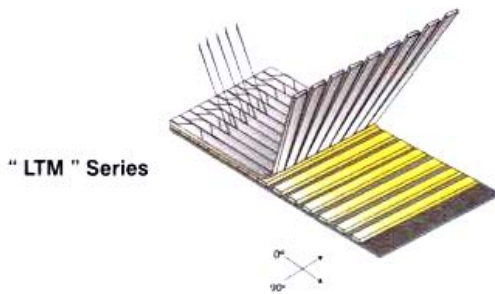

E-LTC3600

Fiber Type : E-Glass
 Architecture: 0° ,90° ,mat
 Dry Thickness: 0.061 in / 1.55mm
 Total Weight **: 36.46oz/yd² / 1236.28g/m²

Layer Number	Fiber Orientation	Yield(yds/lb)	Type	Micron Count	Ends per Inch	oz/yd ²	g/m ²
1	0°	2206tex JUSHI	E-glass fiber	17	7	17.93	607.95
2	90°	735tex JUSHI	E-glass fiber	14	7	17.92	607.68
3							
4							
5							
Stich Yarn	Mod.Tricot 0-1/1-0/2-1/1-2		100% Polyester	150denier		0.61	20.65
Total						36.46	1236.28

* Packing: Box or Bag

** Total weight refers to reinforcement materials (does not include stitching)



STORAGE

Unless otherwise specified, fiberglass products should be stored in a dry, cool and moisture-proof area. Room temperature and humidity should always be maintained at 15°C – 35°C, 35% – 65% respectively.

Best used within 12 months after production date. Fiberglass products should remain in their original packaging until just prior to use.

To ensure safety and avoid damage to the product, the pallets should not be stacked more than two layers high. When the pallets are stacked in two layers, care should be taken to correctly and smoothly move the top pallet.